


STATIC PRESSURE (ins. in W.G.)	AIR VOLUME IN CFM				
	NO DAMPER	OPPOSED DAMPER		SLIDING DAMPER	
		100% OPEN	50% OPEN	100% OPEN	50% OPEN
.01	409	334	273	300	208
.02	601	504	393	452	299
.03	725	605	493	538	369
.04	834	695	549	617	413
.05	918	778	609	695	467
.06	976	851	651	745	503
.07	1061	916	717	809	544
.08	1113	969	761	867	584
.09	1198	1030	804	911	615
.10	1247	1081	855	960	647

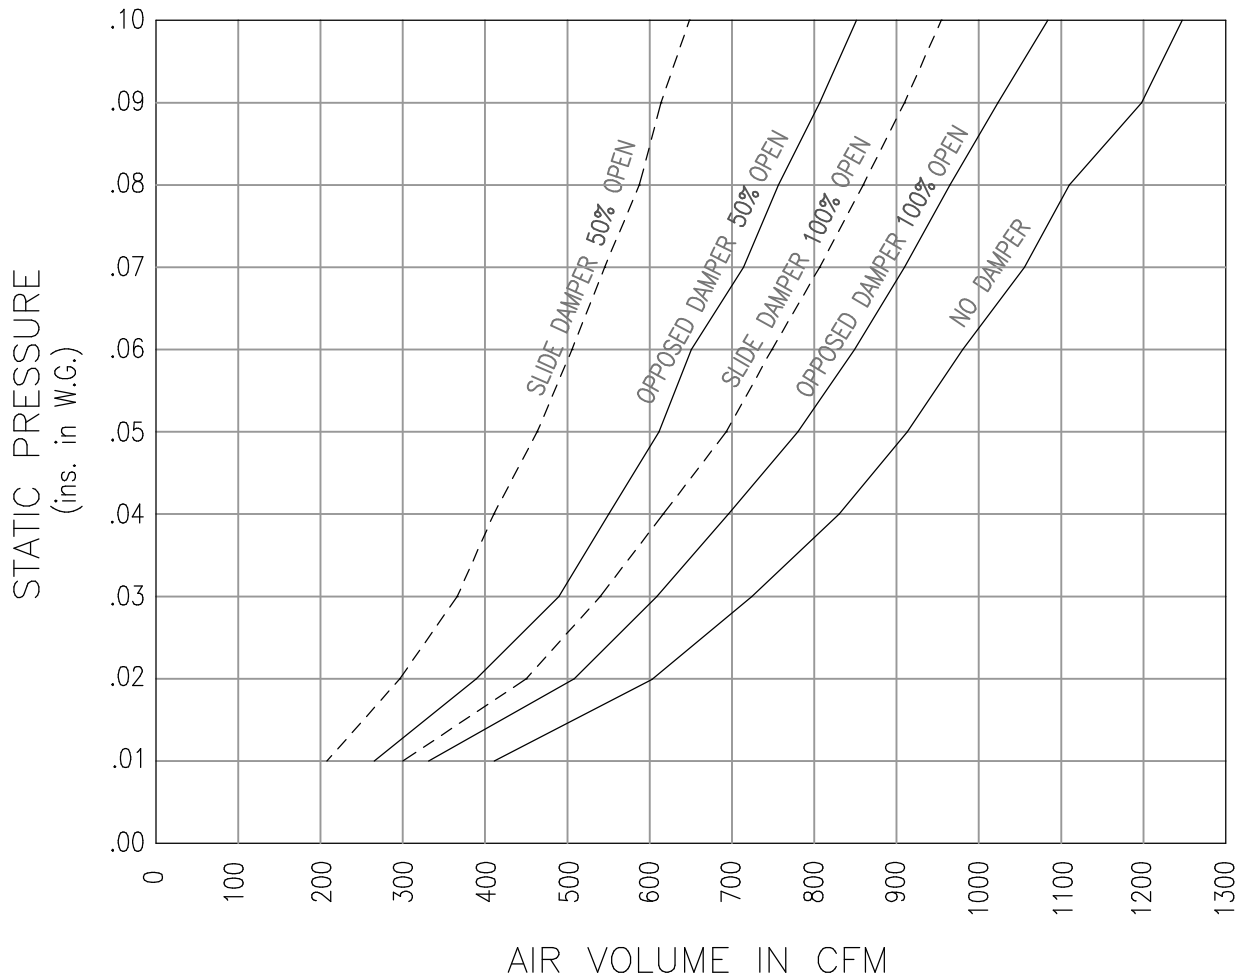

HS 24/60 SLOT HOLE
PERFORATED PANEL
AIR FLOW PERFORMANCE

MAXCESS ALUMINUM FLOORS, INC.

3261 Benchmark Drive, Ladson, SC 29456

TEL (843) 824-1225

FAX (843) 824-1283

No. CS-3026