

Product Data Sheet

	HDS 24	Panel Performance D	ata Sheet 48.4%	Open Area			
3.00	Model Number		30 Series Understructure				
3.10			US	ics	SI		
3.11	Maximum Rolling Load:						
3.12		Wheel 1: 10 Passes	6000	lbs	26.69 kN		
3.13		Wheel 2: 10,000 Passes	3500	lbs	15.57 kN		
3.14	Max. Rolling Load Permanent Set, in.	Wheel 1 Start:	0	in	0.00 mm		
3.15	(Note 1)	10 Passes	0.018	in	0.44 mm		
3.16	Max. Rolling Load Permanent Set,	Wheel 2: Start	0	in	0.00 mm		
3.17	(Note 2)	1,000 Passes	0.002	in	0.05 mm		
3.18		5,000 Passes	0.003	in	0.07 mm		
3.19		10,000 Passes	0.003	in	0.07 mm		
3.20	Design Concentrated Load, 1" X 1" (2.54cm x 2.54cm) Block		3500	lbs	15.57 kN		
3.21	Ultimate Concentrated Load,		6463	lbs	28.75 kN		
3.22	Design Uniform Load,		875	lbs/ft ²	36.16 kN/m²		
3.23	Ultimate Uniform Load		1000	lbs/ft ²	41.33 kN/m ²		
3.24	Maximum Drop Height for Impact, in.: Body 1 (Note 3)		150	lbs	0.67 kN		
3.25	Materials of Construction		Cast Aluminum				
3.26	Painted Parts		None				
3.27	Ease of Access to Subfloor		High				
3.28	Ease of Field Cutting and Sawing		Easy				
3.29	Nonmagnetic (Nonferrous)			Y	98		
3.30	Fuel Contribution Factor per ASTM E-84-84)		
3.31	Flame Spread per ASTM E-84-84)		
3.32	Smoke Density Factor per ASTM E-84-84			()		
3.33	Static Dissipation		Excellent				
3.34	Max. Ohms (DC) Between Uncovered Surface and Bottom of Panel				I		
3.35	Surface to Ground Resistance NFPA 99 Chapter 3			Epoxy Powder C	coat Excel White		
3.36				1 x 10^3	-1 x 10′9		
3.37	Resistance to Oxidization in High Humidity			Exce	llent		
3.38	Resistance to Acids and Polar Solvents		Fair				
3.39	Resistance to Organic (Nonpolar) Solvents		Excellent				
3.40	Suitable Covering Material			Mill Finish, Epoxy Powder Coat Excel White			
3.41	Weight of Panel	Mill Finish	33.5	lbs	15.21 kg		
		Conductive Epoxy Powder Coat	34	lbs	15.44 kg		
3.42	Overall Dimensions Less Covering Material, L" XW"		24in :	x 24in	60.96cm x 60.96cm		
3.43	Depth at Edge Less Covering Material, in.		1.925	in	48.90 mm		
3.44	Warranty		1 Year				
3.45	Approximate Delivery	<3000 Ft ² (300m ²)	12 Weeks				
3.46		>3000 Ft ² (300m ²)		12 W	eeks		

П	Notes
1	Wheel 1: 6" (15.24cm) dia. x 2" (5.08cm) wide
2	Wheel 2: 6" (15.24cm) dia. x 2" (5.08cm) wide
3	Body 1: 1" (2.54cm) dia. steel indenter
4	Panels and understructure can be custom designed to meet the requirements of any application
5	All values given are for panels less covering material

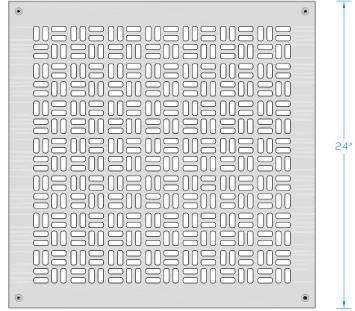

Top View of HDS 24 Panel

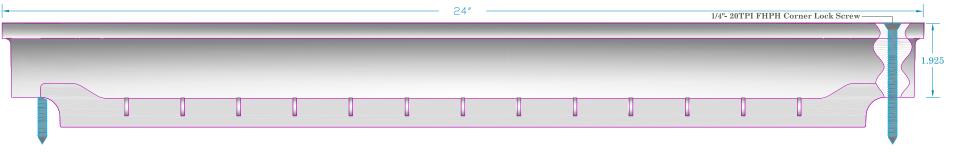

				-							
DRAWN BY: M							16	COMPUTER E 16 JOHN WEST ROAD DALLAS , TX noufactured in the U.S.A.			
PAPER SIZE = 8.5" x 11" LASER SHEET: 1 SCALE: 2.5 = 1 DATE: 14 Dec 2015 Rev: 27 Oct 2 PATH=C: \Users\Ingo\Desktop\HD 24 Product Drawings.dw							PART OR PROJECT DESCRIPTION	HDS 24 Bare Cornerlock Panel			