
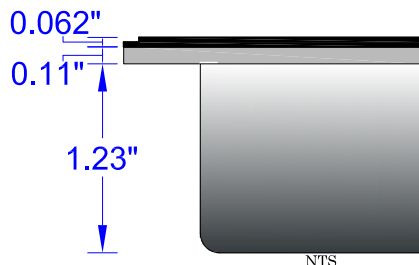


Product Data Sheet

R2F Panel Performance Data Sheet On Pedestal Only and Bolted Understructure

3.00	Model Number	Pedestal Only Understructure		Bolted Understructure		
		USCS	SI	USCS	SI	
3.10						
3.11	Maximum Rolling Load :					
3.12		Wheel 1: 10 Passes	1000 lbs	4.45 kN	1000 lbs	4.45 kN
3.13		Wheel 2: 10,000 Passes	800 lbs	3.56 kN	800 lbs	3.56 kN
3.14	Max. Rolling Load Permanent Set, in., Wheel 1:		0 in	0.00 mm	0 in	0.00 mm
3.15	(Note 1)	10 Passes	0.004 in	0.10 mm	0.004 in	0.10 mm
3.16	Max. Rolling Load Permanent Set,	Wheel 2: Start	0 in	0.00 mm	0 in	0.00 mm
3.17	(Note 2)	500 Passes	0.003 in	0.07 mm	0.003 in	0.07 mm
3.18		5,000 Passes	0.004 in	0.10 mm	0.004 in	0.10 mm
3.19		10,000 Passes	0.004 in	0.10 mm	0.004 in	0.10 mm
3.20	Design Concentrated Load, 1" X 1" (2.54cm x 2.54cm) Block		1250 lbs	5.56 kN	1250 lbs	5.56 kN
3.21	Ultimate Concentrated Load,		3800 lbs	16.90 kN	3800 lbs	16.90 kN
3.22	Design Uniform Load,		371.75 lbs/ft ²	15.36 kN/m ²	371.75 lbs/ft ²	15.36 kN/m ²
3.23	Ultimate Uniform Load		1115 lbs/ft ²	46.09 kN/m ²	1115 lbs/ft ²	46.09 kN/m ²
3.24	Impact Load		150 lbs	0.67 kN	150 lbs	0.67 kN
3.25	Materials of Construction - Shell		Galvanized Steel			
3.26	Materials of Construction - Core		Cementitious Composite			
3.27	Painted Parts		None			
3.28	Ease of Access to Subfloor		High		Medium	
3.29	Ease of Field Cutting and Sawing		Easy			
3.30	Nonmagnetic (Nonferrous)		No			
3.31	Fuel Contribution Factor		Non Combustible Material			
3.32	Flame Spread		Class A Fire Rating			
3.33	Smoke Density Factor per ASTM E-84-84		0			
3.34	Static Dissipation		Excellent			
3.35	Max. Ohms (DC) Between Uncovered Surface and Bottom Pan		1			
3.36	Resistance to Oxidization in High Humidity		Fair			
3.37	Resistance to Acids and Polar Solvents		Poor			
3.38	Resistance to Organic (Nonpolar) Solvents		Fair			
3.39	Suitable Covering Material		All			
3.40	Weight,		8.825 lbs/ft ²		43.08 kg/m ²	
3.41	Overall Dimensions Less Covering Material, L" X W"		24in x 24in		60.96cm x 60.96cm	
3.42	Depth at Edge Less Covering Material, in.		1.34 in		34.04 mm	
3.43	Warranty		1 Year			
3.44	Approximate Delivery	<3000 Ft ² (300m ²)	3 Weeks			
3.45		>3000 Ft ² (300m ²)	5 Weeks			

Notes:
 1. Wheel 1: 3" (7.62cm) dia. x 1-13/16" (4.6cm) wide
 2. Wheel 2: 6" (15.24cm) dia. x 2" (5.08cm) wide
 3. All values given are for panels less covering material.

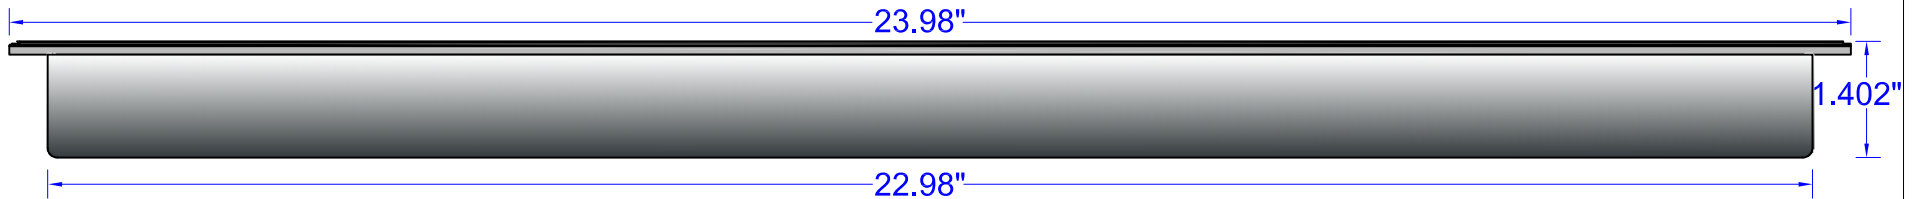

JOB: Typical	REVISED BY:	DATE:	DESCRIPTION:
CEI PART #: Maxcess R2F			
DRAWN BY: MC			
PAPER SIZE = 8.5" x 11" LASER			
SHEET: 1 of 1	SCALE: 2.5 = 1	DATE: 9 Feb 2018	
PATH=C:\documents and settings\authorized user\desktop\ autocad drawings\maxcess steel.dwg			

Computer Environments Inc.
 1616 JOHN WEST ROAD DALLAS, TX, USA 75228 214 321 1234 FAX 214 321 2333 ceifloor.com
 Manufactured in the U.S.A.

PART OR PROJECT DESCRIPTION: Maxcess R2F Panel With Factory Applied 1/16" High Pressure Laminate